

SKU# 320199

10" - 14 gauge spun aluminum ball  
gold anodized

Double sheave truck, cast aluminum  
revolving, non-fouling type

3 Bronze swivel snap with covers  
per halyard

1 Set of halyards: #12 poly

1 - 9" Cast aluminum cleats

Aluminum flash collar

3000 PSI concrete

Hardwood wedges  
(supplied by others)



Dry sand tightly tamped  
after aligning pole

Foundation sleeve -16 ga  
hot dip galvanized steel

Steel centering wedges

1/4" Steel base plate

1/4" Steel support plate  
welded to grounding spike

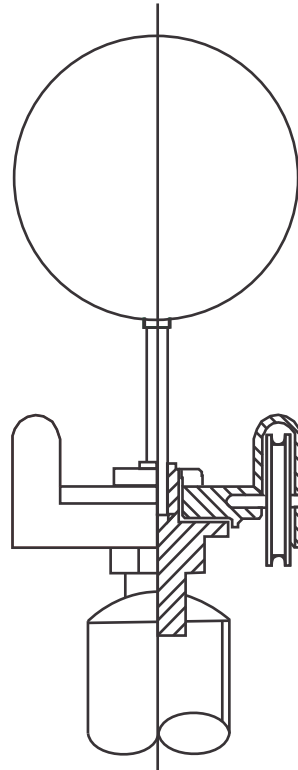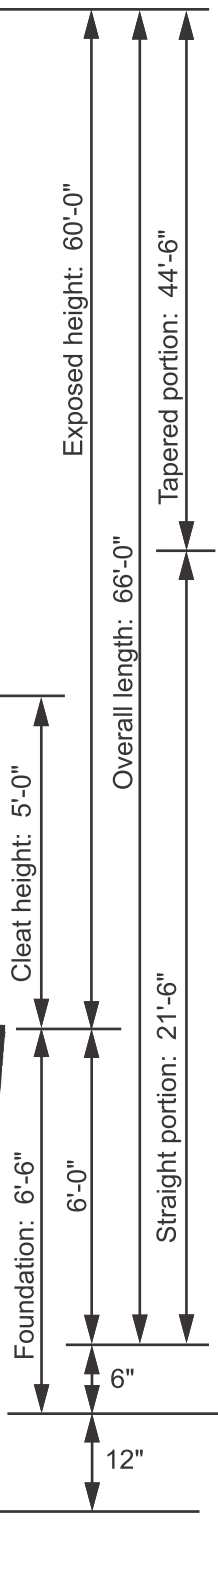

**Truck Detail**


Revolving, non-fouling truck  
Cast aluminum body  
Stainless steel ball bearings  
Nylon sheaves  
Cast aluminum spindle



All shafts with overall length of more than 38'-6" are shipped in two sections.

Each section matched marked for field assembly. Exposed portion of jam sleeve must be **well lubricated** prior to assembly.

1-1/2" maximum shop gap allowed for field fitting (ram for tight joint)



Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	Flags Unlimited, Inc.	Date:
Location:	Exposed height: 60'-0" Overall height: 66'-0"	10236 Fisher Ave.	Revision:
Architect:	Ship in 3 sections Butt diameter: 10"	Tampa, FL 33619	
Contractor:	Top diameter: 4" Wall thickness: .188"	www.usflags.com	
Customer:	Finish: 100 grit polish	813-684-1782 Voice 813-654-4272 FAX	Job: